


Angle Power Strip TR Series

Tamper Resistant Receptacles - Eliminate cutouts for receptacles and switches in your backsplash



FEATURES

- Easy Installation
- Designer finishes to blend with any decor
- Meets 2008 NEC® Code
- Custom options include phone jacks, cable jacks, data ports and more
- 3-Year Limited Warranty

APPLICATIONS

- Kitchens
- Baths
- Offices & Computer Labs
- Islands
- Shops & Garages

SPECIFICATIONS

Construction Materials: Powder Coated Aluminum

Input Voltage: 120V

Mounting Wood Screws & Mollies

Wiring: 12g Romex

Environment: Dry Only

Finishes:



White
(WT)



Black
(BK)



Satin Nickel
(SN)



Bronze
(BZ)

Receptacle Colors:



Black
(B)



Grey
(G)



White
(W)

PART #	Length	# of Recept	Recept. Color	Finish
TR9-1ColorD-P-Finish	9"	1	B, G,W	SN, WT, BZ, BK
TR12-1ColorD-P-Finish	12"	1	B, G,W	SN, WT, BZ, BK
TR18-1ColorD-P-Finish	18"	2	B, G,W	SN, WT, BZ, BK
TR24-1ColorD-P-Finish	24"	2	B, G,W	SN, WT, BZ, BK
TR30-1ColorD-P-Finish	30"	2	B, G,W	SN, WT, BZ, BK
TR36-1ColorD-P-Finish	36"	2	B, G,W	SN, WT, BZ, BK
TR42-1ColorD-P-Finish	42"	3	B, G,W	SN, WT, BZ, BK
TR48-1ColorD-P-Finish	48"	3	B, G,W	SN, WT, BZ, BK
TR60-1ColorD-P-Finish	60"	4	B, G,W	SN, WT, BZ, BK
TR72-1ColorD-P-Finish	72"	4	B, G,W	SN, WT, BZ, BK

Example Part Number: TR9-1BD-P-SN = 9" Strip, (1) Black Duplex Receptacle, Powder Coated Satin Nickel Finish

INSTALLATION COMPONENTS

TR-SQ-JB-P-Finish	3" x 3" x 2-1/8" Square Junction Box
TRC9-1SPS-Color-P-Finish	9" TR Series APS with single pole switch offset to right
TRC9-4PORT-Color-P-Finish	9" TR Series APS with 4-port data insert
TRC9-BLANK-Color-P-Finish	9" TR Series APS blank junction box




MADE IN THE
USA


ANGLE POWER STRIP TR SERIES

Standard Sizes & Configurations


TR72-4ColorD-Finish




TR48-3ColorD-Finish



TR42-3ColorD-Finish




TR36-2ColorD-Finish




TR30-2ColorD-Finish



TR24-2ColorD-Finish



TR18-2ColorD-Finish



TR12-1ColorD-Finish



TR9-1ColorD-Finish



○ = Knock-out (all knock-outs are 1 1/2" from end)

▭ = Receptacle (15v receptacle standard)

Receptacle placement is approximate



ANGLE POWER STRIP TR SERIES

Combination Devices




Switches




Receptacles



Connectors




Port Frames

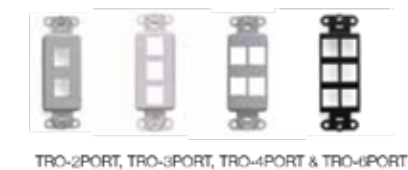

Snap-in Connectors



Power Supply

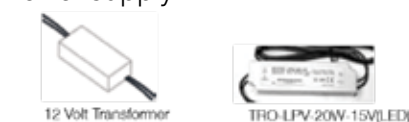

TR SERIES CUSTOM OPTIONS

Custom Lengths

Custom lengths to the 1/4" between 9" and 144", priced to the next larger size

Switches

PART #	Description	Color
TRO-SPS-Color	Decora single-pole rocker switch	B, G,W
TRO-SPS-20A-Color	Decora 20 amp single-pole rocker switch	B, G,W
TRO-3WS-Color	Decora 3-way rocker switch	B, G,W
TRO-3WS-20A-Color	Decora 20 amp 3-way rocker switch	B, G,W
TRO-4WS-Color	Decora 4-way rocker switch	B, G,W
TRO-DS-2SPS-Color	Decora double switch	B, G,W
TRO-DS-(2)3WS-Color	Double switch with (2) 3 way	B, W
TRO-DS-1P/3P-Color	Double switch with single pole & 3 way	B, G,W
TRO-TS-3SPS-Color	Decora triple switch	W

Receptacles

TRO-15A-REC	15amp tamper-resistant receptacle	B, G, W
TRO-20A-REC	20amp tamper-resistant receptacle	B, G, W

Receptacles/Switch Combo

TRO-USB/REC	Combination (2) USB ports and receptacle	
TRO-CB-1P/REC-Color	Combination single pole switch and receptacle	B, G, W
TRO-CB-3P/REC-Color	Combination 3-way switch & receptacle	B, G, W

Connectors

TRO-CJ-Color	Decora style Cable Jack, "F" Style, for 75 Ohm coaxial cable	B, G, W
TRO-PJ-Color	Decora style 6 conductor telephone jack	B, G, W

Port Frames

TRO-2PORT-Color	Decora, style multimedia insert. Allows you to combine your choice of 2,3,4 or 6 voice, data, audio or video connectors into one compact, attractive wallplate	B, G, W
TRO-3PORT-Color		
TRO-4PORT-Color		
TRO-6PORT-Color		

Snap-in Connectors

TRO-CON-BLANK-Color	Blank insert used to cover up any unused openings in any of the Port Frames	B, G, W
TRO-CON-CAT5e-Color	Snap-in Data Category 5e 8-conductor channel-rated connector. 100 MHz	B, G, W
TRO-CON-CAT6-Color	Snap-in Date Category 6 8-conductor component-rated connector. 250 MHz	B, G, W
TRO-CON-PJ-8-Color	6-conductor USOC voice grade phone (jack) connector	B, G, W

Power Supplies



TRO-LPV-20W-15V	15vDC 20-watt LED power supply
TRO-LPV-35W-15V	15vDC 35-watt LED power supply
TRO-TE60	12vAC 60-watt electronic transformer with internal thermal device.
TRO-TE75EX	12vAC 75-watt electronic transformer with internal thermal device.
TRO-TE100	12vAC 100-watt electronic transformer with internal thermal device.
TRO-TE150EX	12vAC 150-watt electronic transformer with internal thermal device.

ANGLE POWER STRIP TR SERIES


Installation Instructions

GENERAL GUIDELINES


- Power source **MUST** be a 20 amp branch circuit protected by a GFCI at the panel or GFCI prior to the connection a APS -TR SERIES
- All wiring must meet NEC and local codes. The Angle Power Strip - Tamper Resistant (APS-TR Series)) must be installed by a licensed electrician.
- Use knockout holes for 120V wire entrance. Use listed Romex connectors provided for 120V electrical connections.
- Use tool provided to pry open for wiring. (Using other devices may damage the aluminum cover.)
- Field cutting voids warranty.

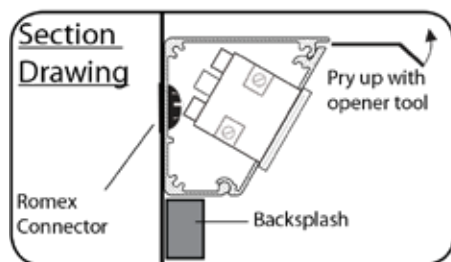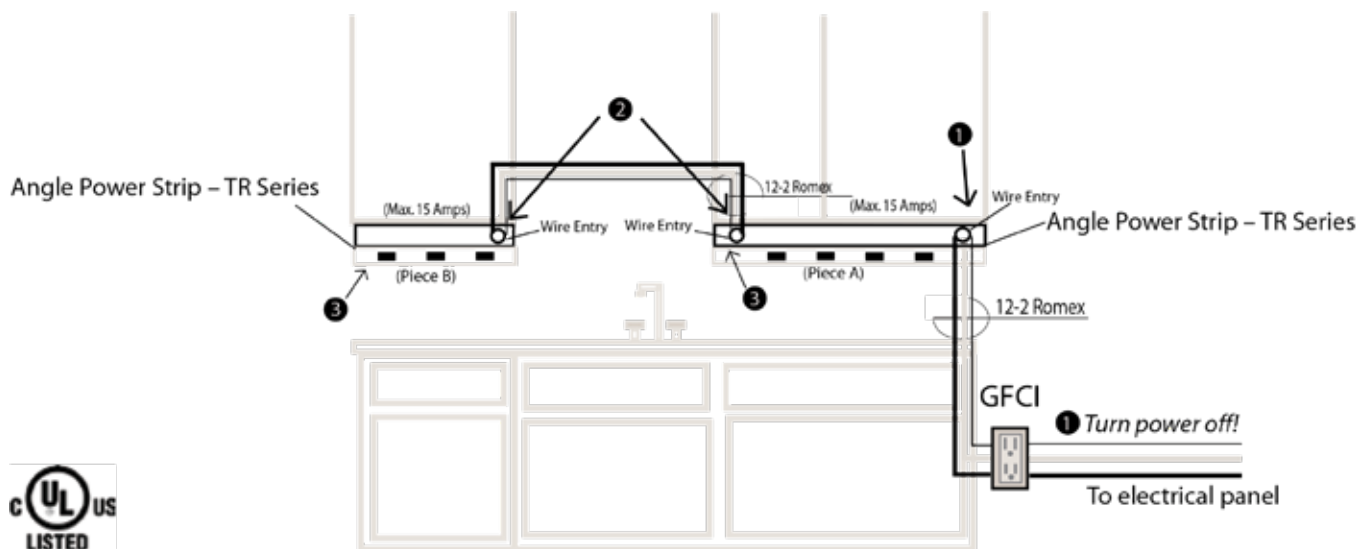

1 Turn power off at panel. Pry open each piece with tool (provided). Insert Romex connector into hole. Pull wires into APS-TR Series.

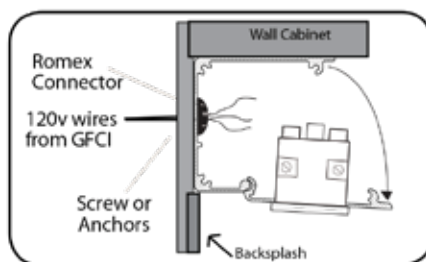

2 Secure APS-TR Series to wall with screws into each stud or use anchors provided. Strip wires and connect black to black, white to white. Ground all green wires to grounding stud on inside back of frame. When connecting two APS-TR Series, run Romex from piece A to piece B. Ground each section to the next.

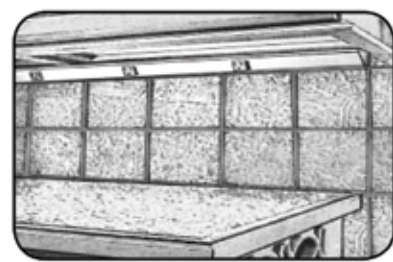

3 To terminate last APS-TR Series, use wire nuts on ends of wires. Snap cover in place and turn power on.