



Striplox™ Pro 23

Makes concealed joints easy

Striplox Pro 23 makes joining faster and simpler. Expanding on the versatile Pro range, the conveniently sized Striplox Pro 23 will mount to the most commonly used standard sized framing and stud whilst delivery high strength and durability due to its unique design where loads are distributed evenly over the entire product.

Designed for panels, frames and components, this hidden mounting system delivers a flawless finish with perfect alignment every time.

The secret to Striplox is the unique award winning design, internationally patented secure fastening system suitable for a wide variety of substrates. By using Striplox designers, installers and manufactures are able to re-think assembly processes.

Striplox is perfect for many applications/designs and are only limited by your imagination. Striplox Pro 23 is the perfect joining solutions for all cabinetry and can be removed and refitted time after time.



Benefits


- No visible fixings
- Eliminates damage – install panels during final build
- Lower transportation cost – flat pack
- Lower labour costs on site assembly
- Designed using the internationally recognised 32 system
- Strength, Durability and Versatility
- No tools or trade skills required for assembly
- Cabinetry or panels can be fitted permanently or removed and re-used with ease
- Striplox Pro 23 can be configured in many different ways to best suit your application, surface mount or rebate mount and orientated for vertical or horizontal assembly
- Variety of mounting options glue and or screw fix



Applications


- Ceilings, walls, cabinetry, feature panels
- Commercial wall paneling and office partitioning
- Enhanced performance of acoustic paneling
- Floating shelves
- Furniture construction and interior fitting
- Shop fitting displays and signage
- Exhibition and trade events
- DIY garden shed and Patio
- RV and Marine fitouts

How it works

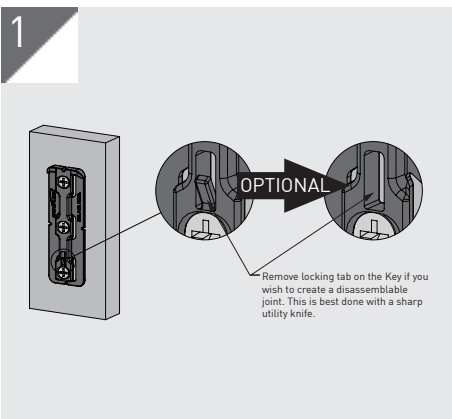


Installation

Attach both components of the Pro 23 to the desired substrates.
Remove locking tab if required.

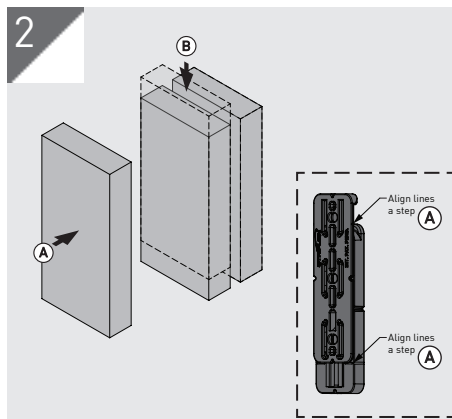

Assembly

Both components of Pro 23 self align and slide to lock into place. Due to the unique design, the components only need to travel one pitch for full engagement.

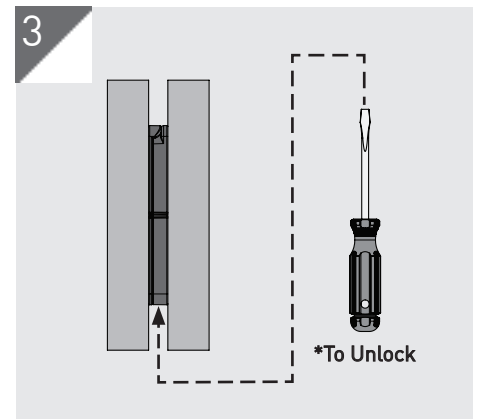

Completion

Complete the installation according to the desired application.


To unlock insert a small screwdriver to release locking tab.

Specifications


Material: High Strength Reinforced Nylon Colour: Black Fixing: 8G Screws (5x) or Glue *Ensure sufficient screw embedment in substrate. *Tested using Particle Board and fixed with screws.	Direction	Indic. Load Capacity
	A	242 lb
	B	209 lb
	C	352 lb

- Refer to Mounting Data Sheet for full dimensions
- Refer to Installation Guide

Dimensions

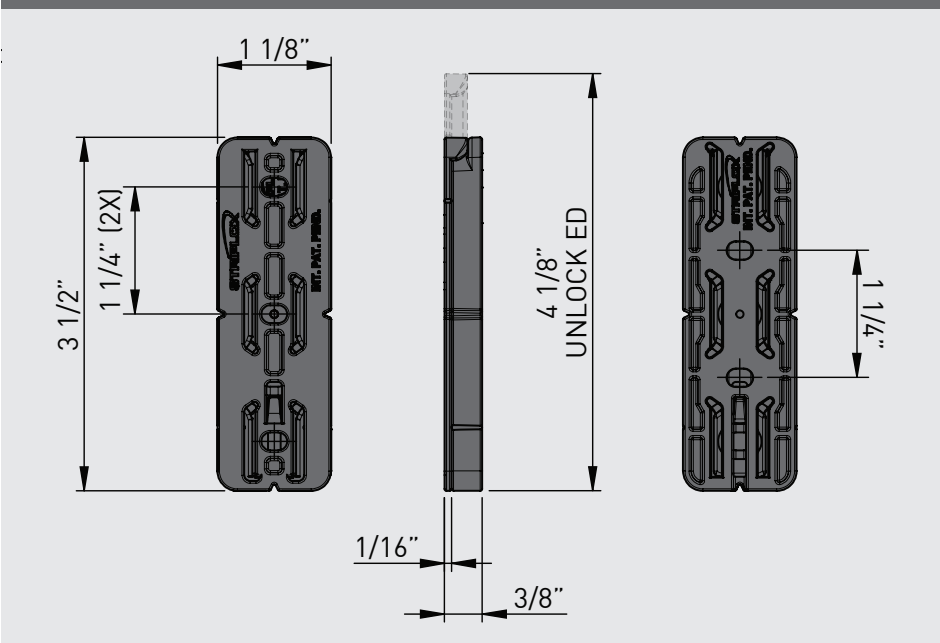

Load Direction

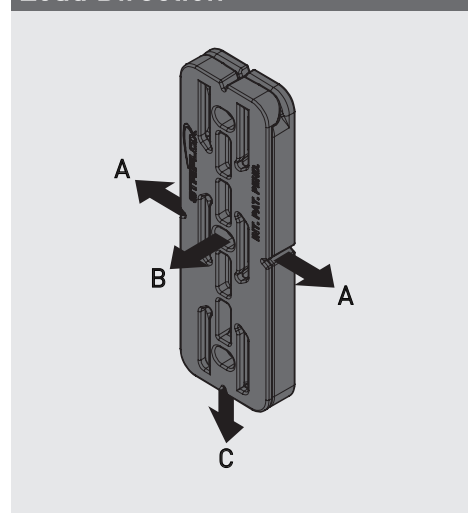

Proudly Australian Designed, Owned and Manufactured

Striplox products are designed and tested for a range of applications. Product use is subject to variable materials and conditions. Technical information and load capacities are a guide only without warranty and Joinlox will not be liable for any subsequent damage or loss from the use of the products or this information.