


CG-12 Corner Guard

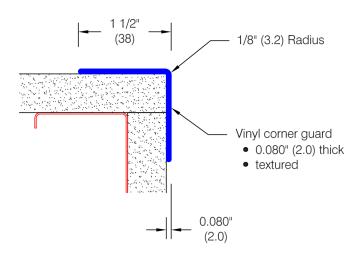

Countersunk hole for #6 fastener

Optional Drilling:

• Standard spacing: 1" (25) from each end and spaced evenly not to exceed 36" (914) oc

Features:

- · Class A fire rating
- Stock lengths: 4'-0" (1219), 8'-0" (2438) & 12'-0" (3658)

Finishes:

- Manufacturer's standard colors
- Custom colors available

Mounting Options:

Adhesive

ADH-30 adhesive supplied separately

Drilled

Countersunk holes for ABSS-134 #6 x 1 1/2" (38) oval head sheet metal screw supplied separately as required

Taped

ADH-4042 double sided adhesive tape factory applied to corner guard

